


ITR1201SR10AR/TR

Features

- Fast response time
- High sensitivity
- Cut-Off visible wavelength
- Thin
- Compact
- Pb free
- This product itself will remain within RoHS compliant version.
- Compliance with EU REACH.
- Compliance Halogen Free(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm).



Description

ITR1201SR10AR/TR is a light reflection switch which includes a GaAs IR-LED and a NPN photo-transistor with a high photosensitive receiver for short distance, operating in the infrared range.


Applications

- Printer
- Switch Scanner
- Non-contact Switching

Device Selection Guide

Device No.	Chip Material
IR	AlGaAs
PT	Silicon

Package Dimensions

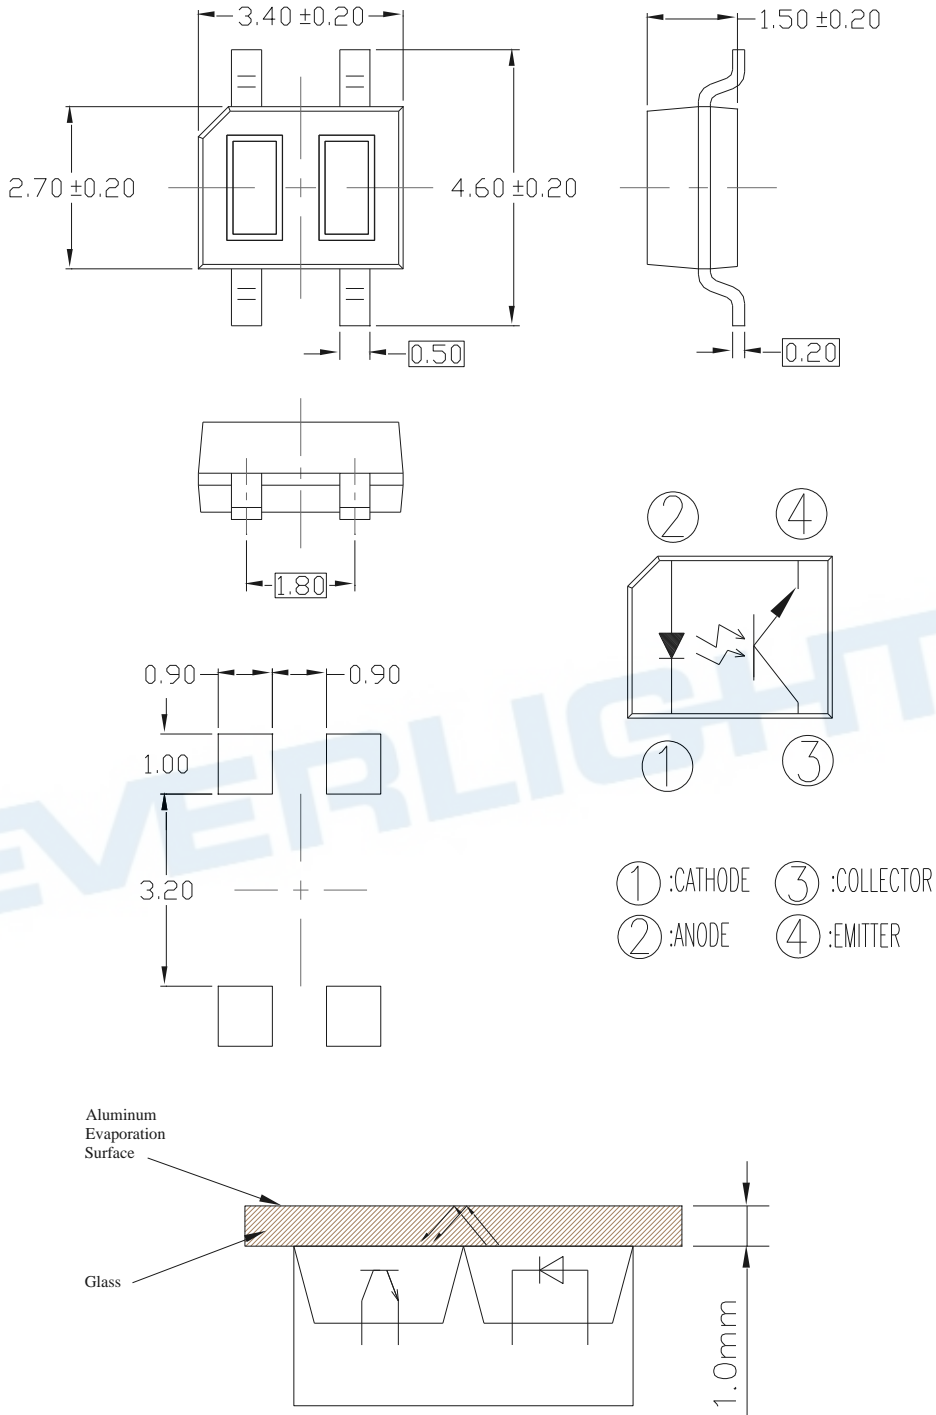

- Notes:** 1. All dimensions are in millimeters
2. Tolerances: ±0.15mm

Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Power Dissipation at(or below) 25°C Free Air Temperature	Pd	75	mW
	Reverse Voltage	V _R	5	V
	Forward Current	I _F	50	mA
	Peak Forward Current (*1) Pulse width ≤ 100μ s, Duty cycle=1%	I _{FP}	1	A
Output	Collector Power Dissipation	P _C	75	mW
	Collector Current	I _C	10	mA
	Collector-Emitter Voltage	B V _{CEO}	30	V
	Emitter-Collector Voltage	B V _{ECO}	5	V
Operating Temperature		Topr	-25~+85	°C
Storage Temperature		Tstg	-40~+100	°C
Lead Soldering Temperature (*2)		Tsol	260	°C

Notes: (* 1) tw=100 μsec. , T=10 msec. (* 2) t=5 Sec

Electro-Optical Characteristics (Ta=25°C)



Parameter		Symbol	Min.	Typ.	Max.	Unit	Condition
Input	Forward Voltage	V _F	1.1	1.2	1.4	V	I _F =20mA
	Reverse Current	I _R	---	---	10	μA	V _R =6V
	Peak Wavelength	λ _P	---	940	---	nm	I _F =20mA
Output	Dark Current	I _{CEO}	---	---	100	nA	V _{CE} =10V
Transfer Characteristics	Transfer Characteristics	I _{C(ON)}	100	---	1000	μA	V _{CE} =5V, I _F =20mA
	Operating Dark Current	I _{CEOD}	---	---	1	μA	V _{CE} =5V, I _F =20mA
	Rise time	t _r	---	15	---	μs	V _{CE} =5V I _C =1mA R _L =1KΩ
	Fall time	t _f	---	15	---	μs	



Rank

Conditions: I_F=20mA V_{CE}=5V Unit: μA


Bin number	Min	Max	Bin number	Min	Max
A1	100	300	C1	500	700
A2	200	400	C2	600	800
B1	300	500	D1	700	900
B2	400	600	D2	800	1000

Typical Electrical/Optical/Characteristics Curves

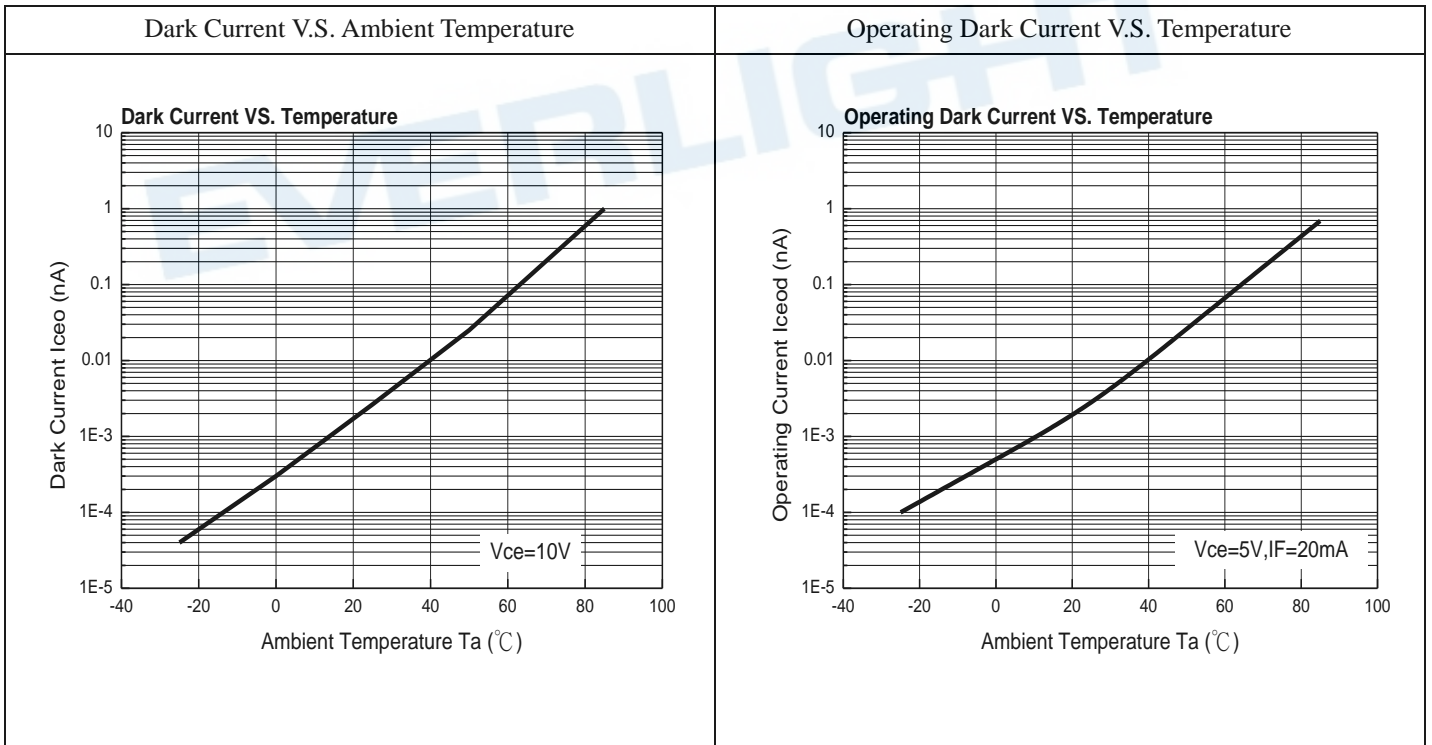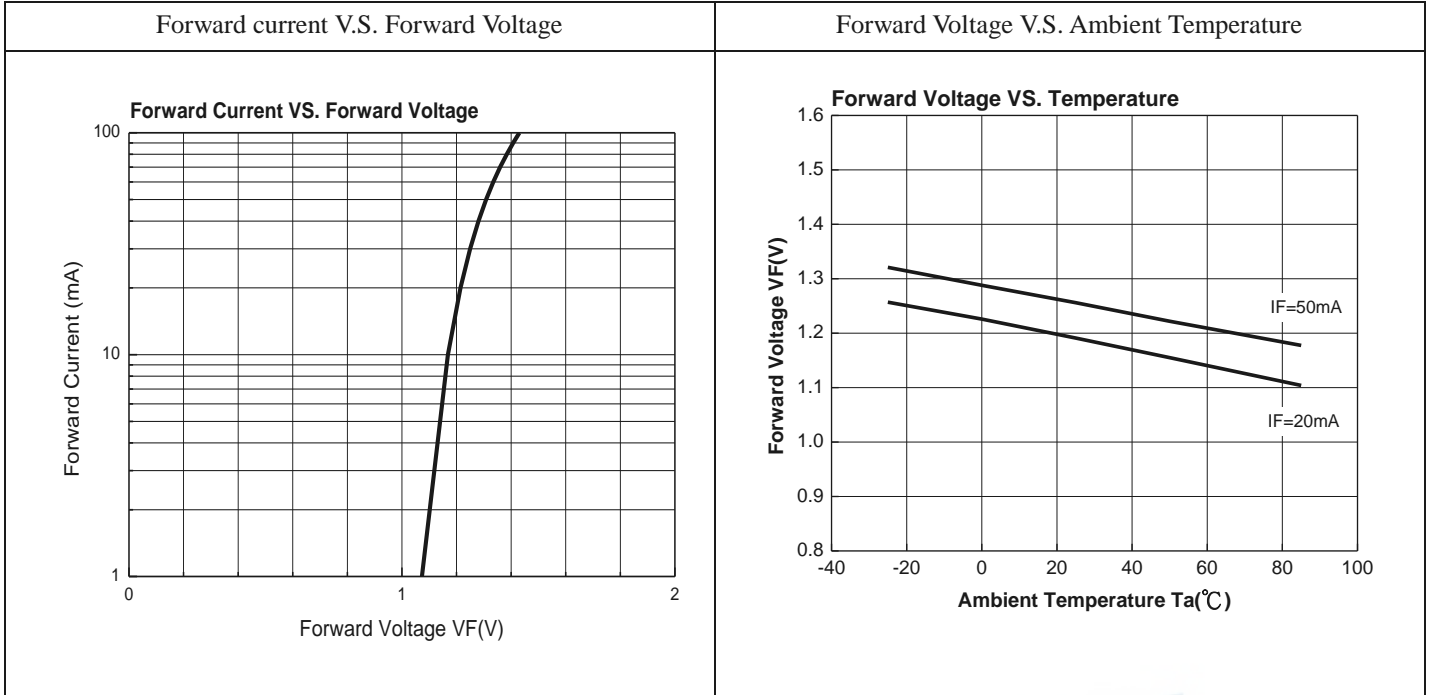


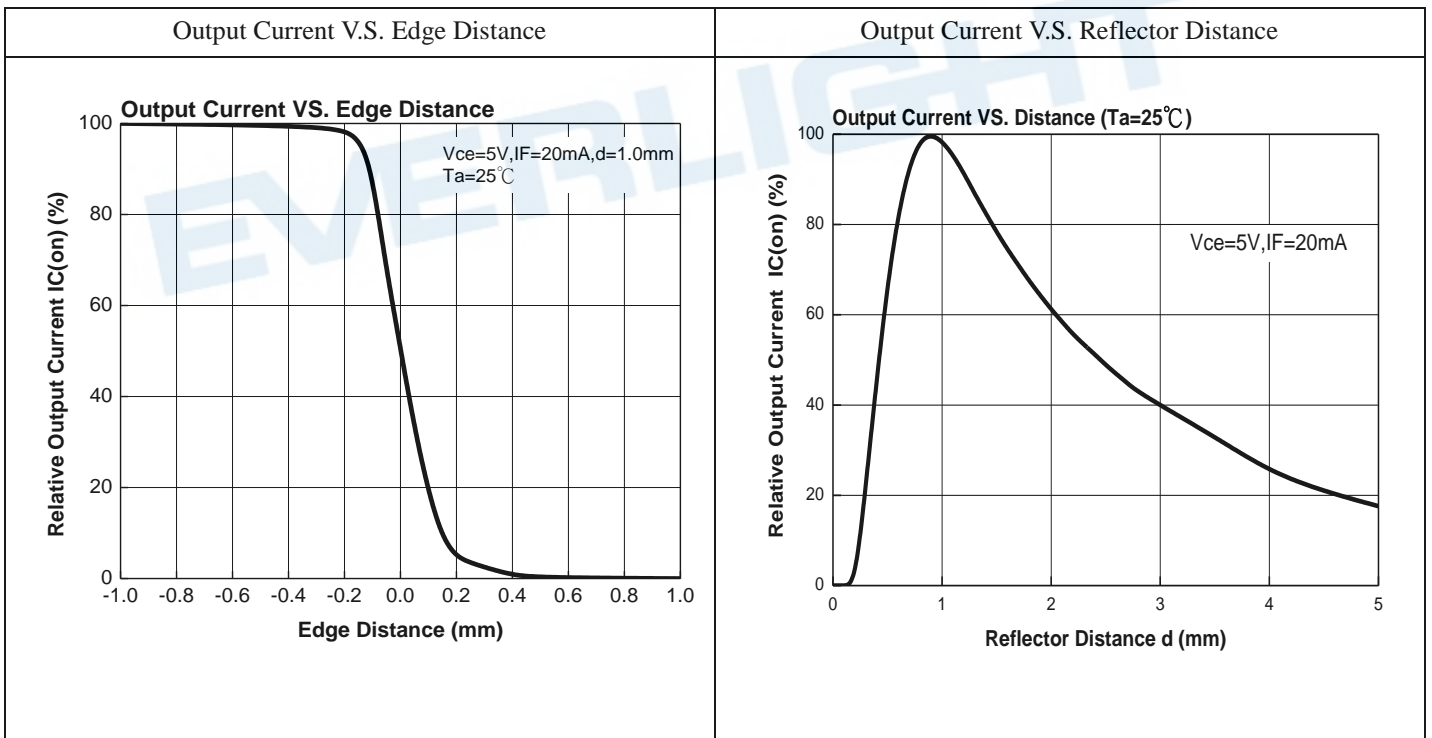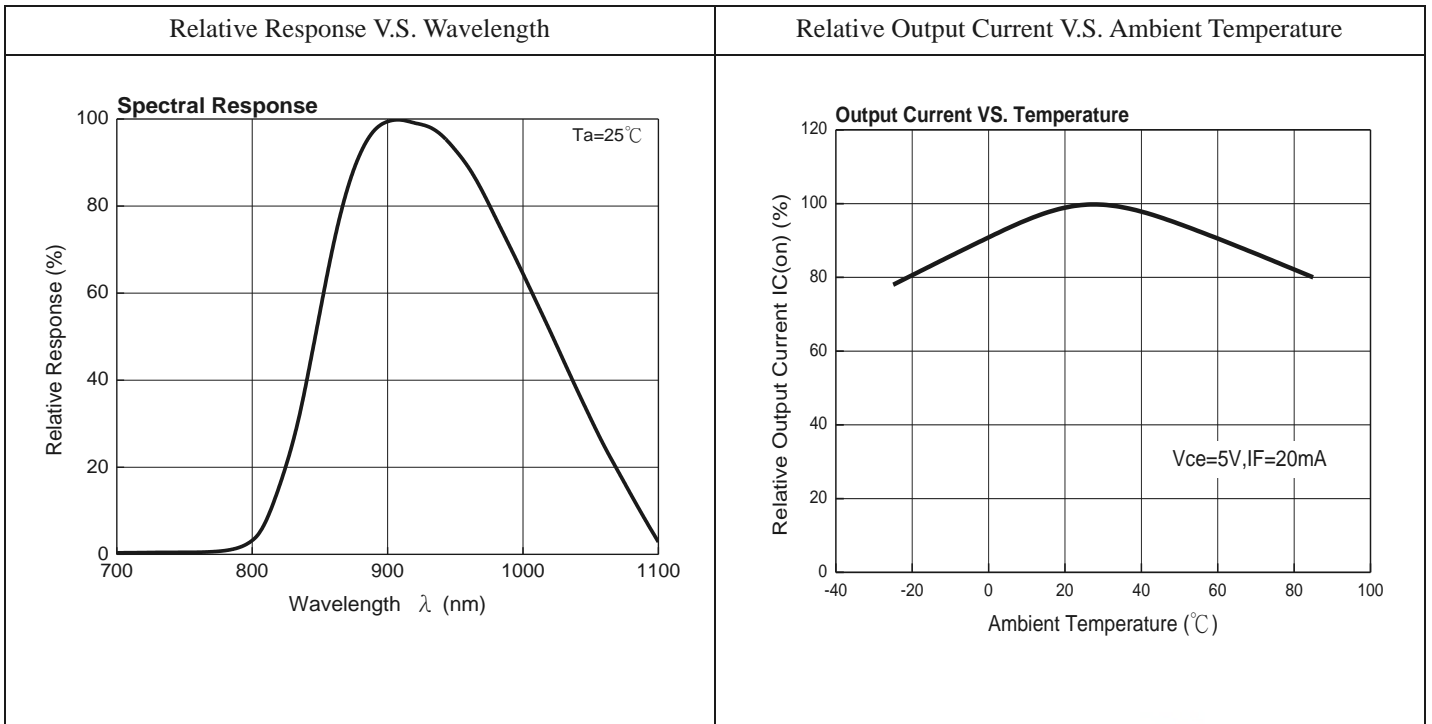


Switching Time V.S. Load Resistance

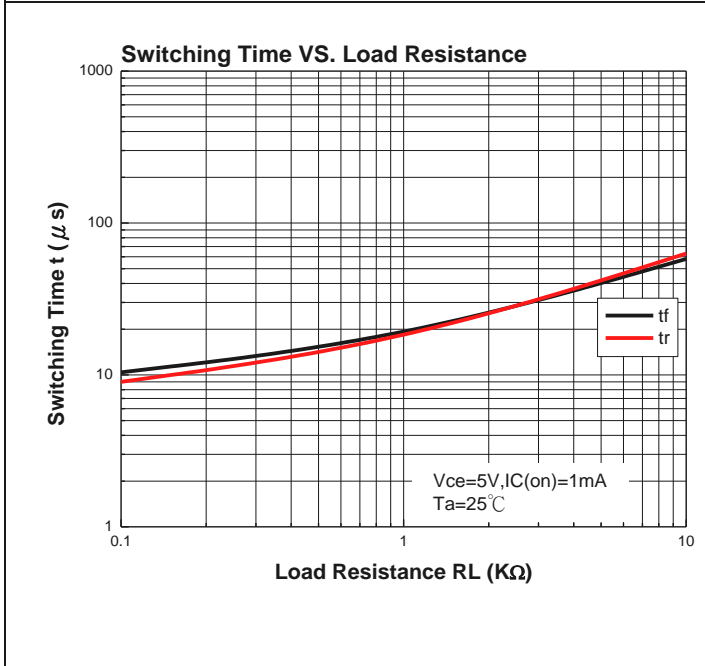


Output Current V.S. Forward Current

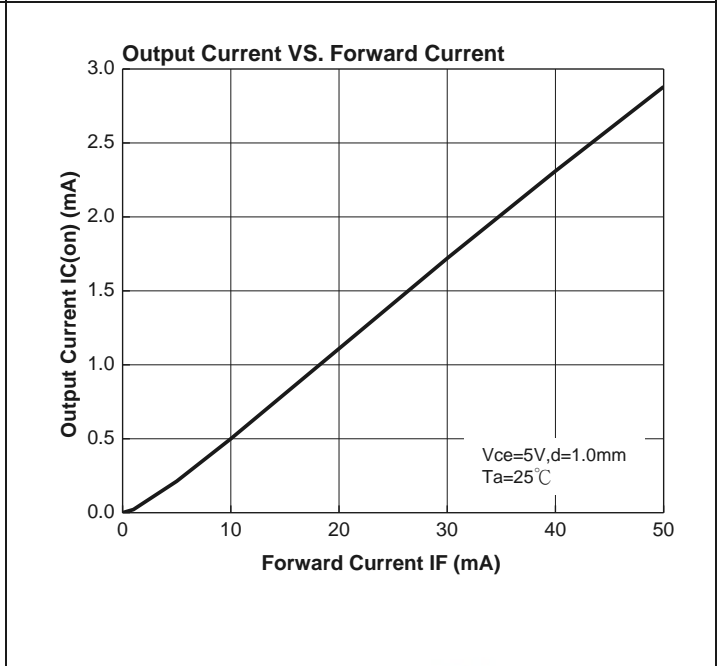


Output Characteristics

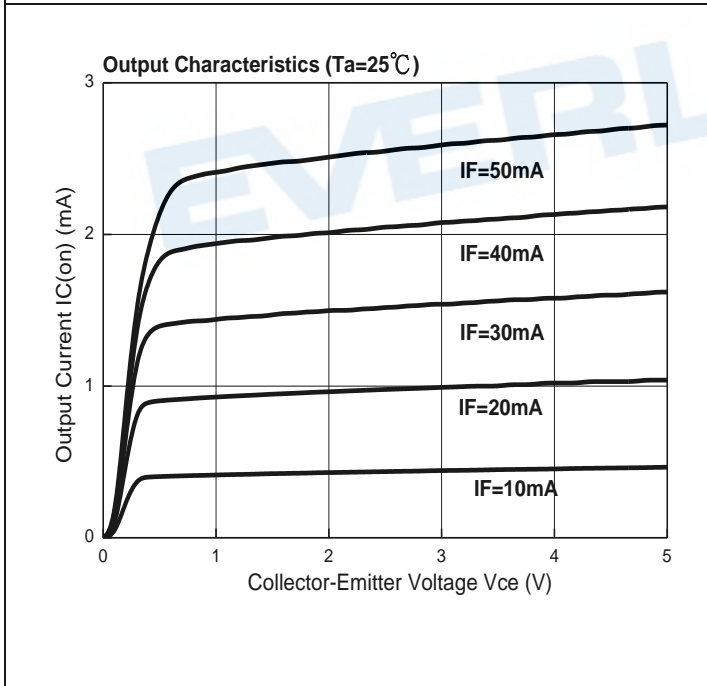


Measuring Specification For Output Current

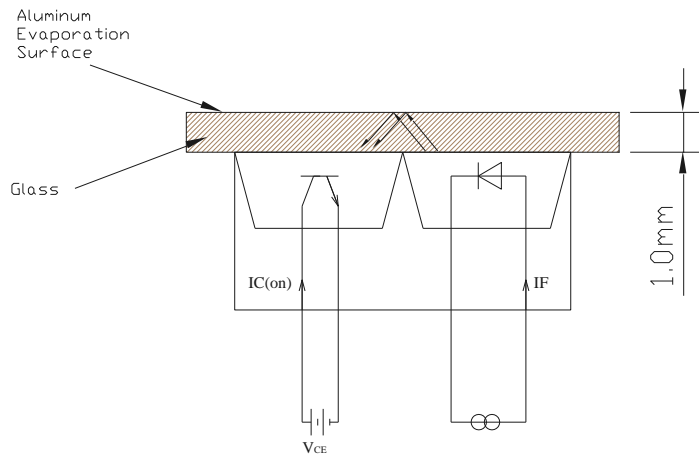


Measuring Circuit For Operating Dark Current

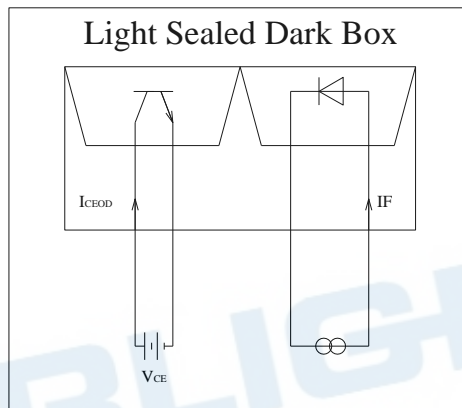



Measuring Specification For Reflector Response

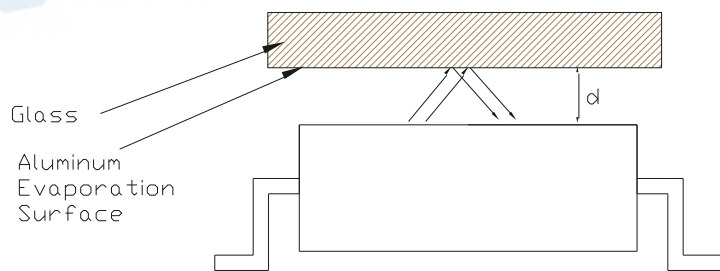

Measuring Specification For Edge Response

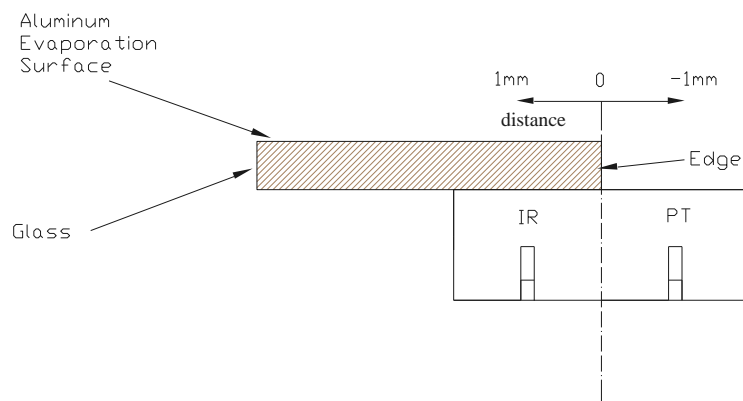


Measuring Circuit For Response Time

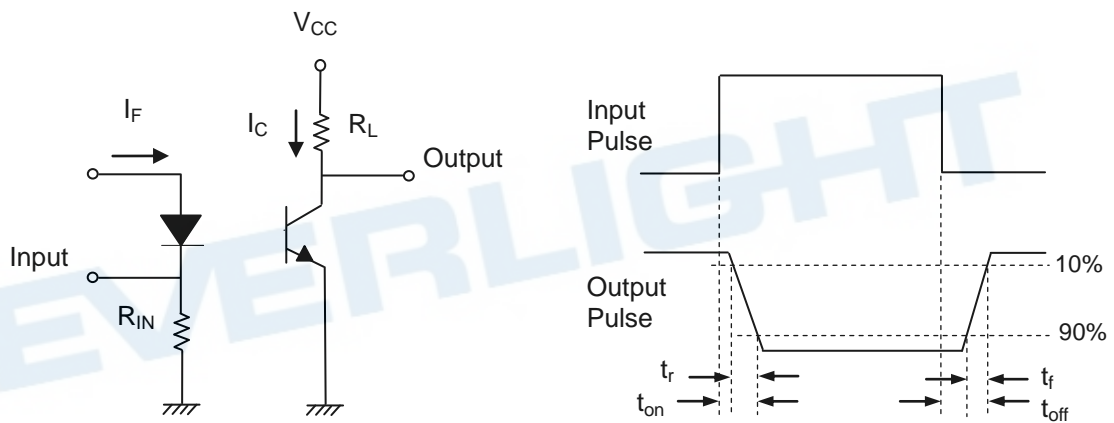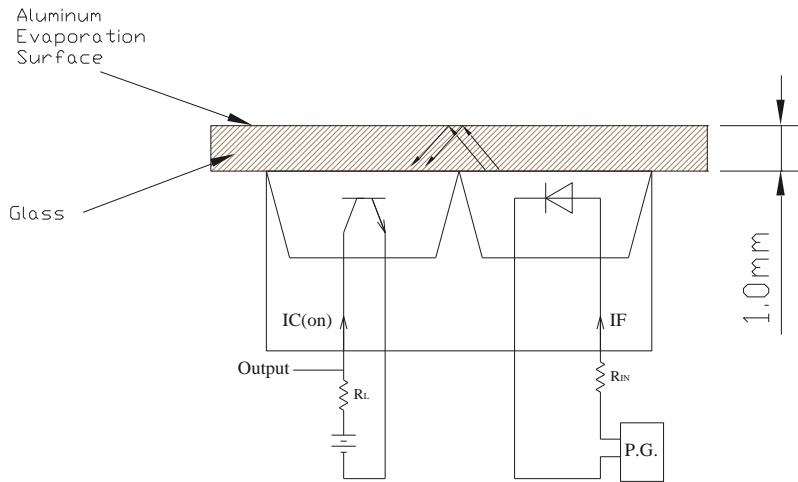


Recommended Method of Storage


1. Over-current-proof
Customer must apply resistors for protection , otherwise slight voltage shift will cause big current change (Burn out will happen).
2. Storage
 - 2.1. Do not open moisture proof bag before the products are ready to use.
 - 2.2. Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
 - 2.3. The LEDs should be used within a year.
 - 2.4. After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
 - 2.5. The LEDs should be used within 168 hours (7 days) after opening the package.
 - 2.6. If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5°C for 24 hours.
3. Soldering Condition
 - 3.1. Pb-free solder temperature profile

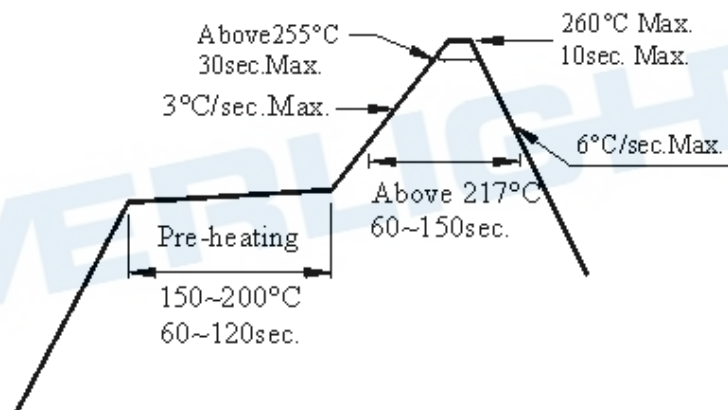

- 3.2. Reflow soldering should not be done more than two times.
- 3.3. When soldering, do not put stress on the LEDs during heating.
- 3.4. After soldering, do not warp the circuit board.
4. Repairing
Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

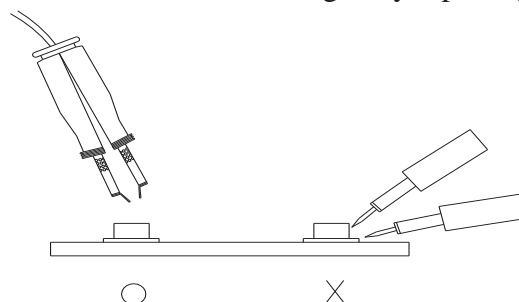


Taping Dimension

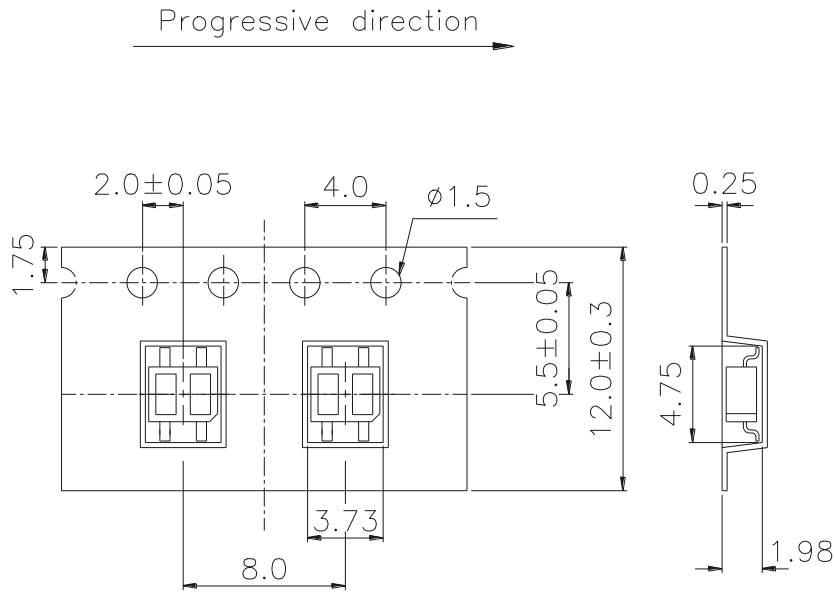


General Tolerance ± 0.1
UNIT:mm

Package Dimensions

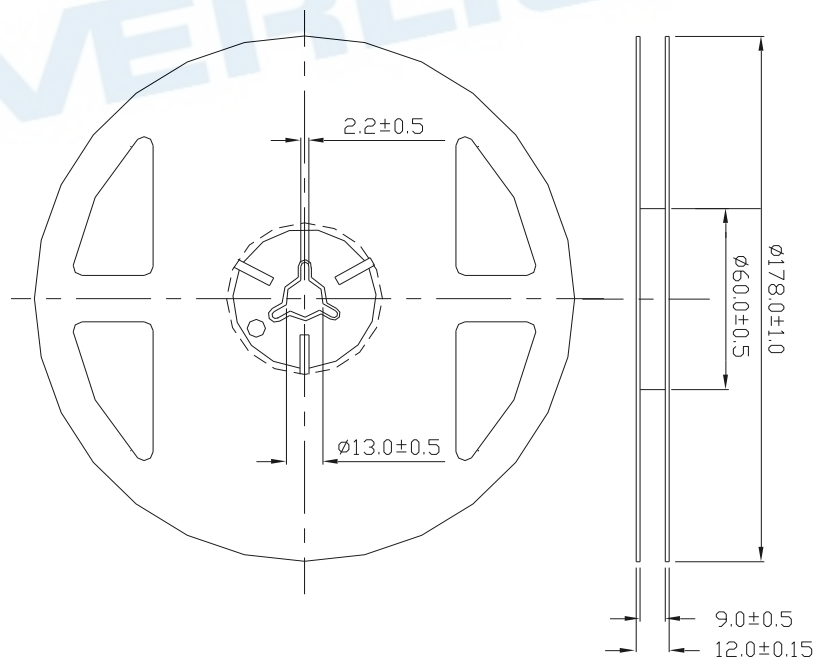

Moisture Resistant Packaging

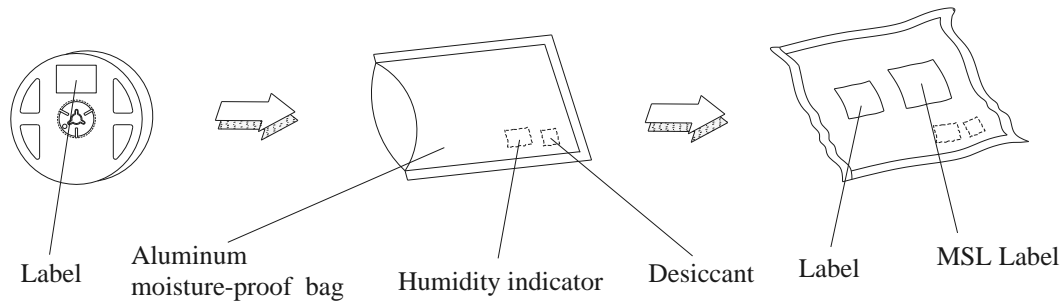

Packing Quantity Specification

- 1.1000 Pcs/ 1Reel
- 2.15 Reel /1 Box
- 3. Box/ 1 Carton

Label Form Specification

CPN: Customer's Production Number

P/N : Production Number

QTY: Packing Quantity


CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

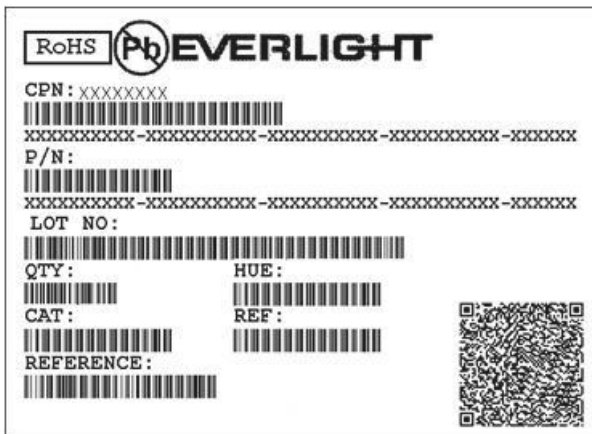

Disclaimer

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT